

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number
WO 2005/045166 A1

(51) International Patent Classification⁷: E05C 19/04,
19/02, E05F 5/00

(21) International Application Number:
PCT/AU2004/001547

(22) International Filing Date:
10 November 2004 (10.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003906173 10 November 2003 (10.11.2003) AU

(71) Applicant and

(72) Inventor: PILLJA, Milan [AU/AU]; 16 James Street,
Woodville West, S.A. 5011 (AU).

(74) Agent: COLLINSON & CO; 117 King William Street,
Adelaide, S.A. 5000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A DOOR CATCH

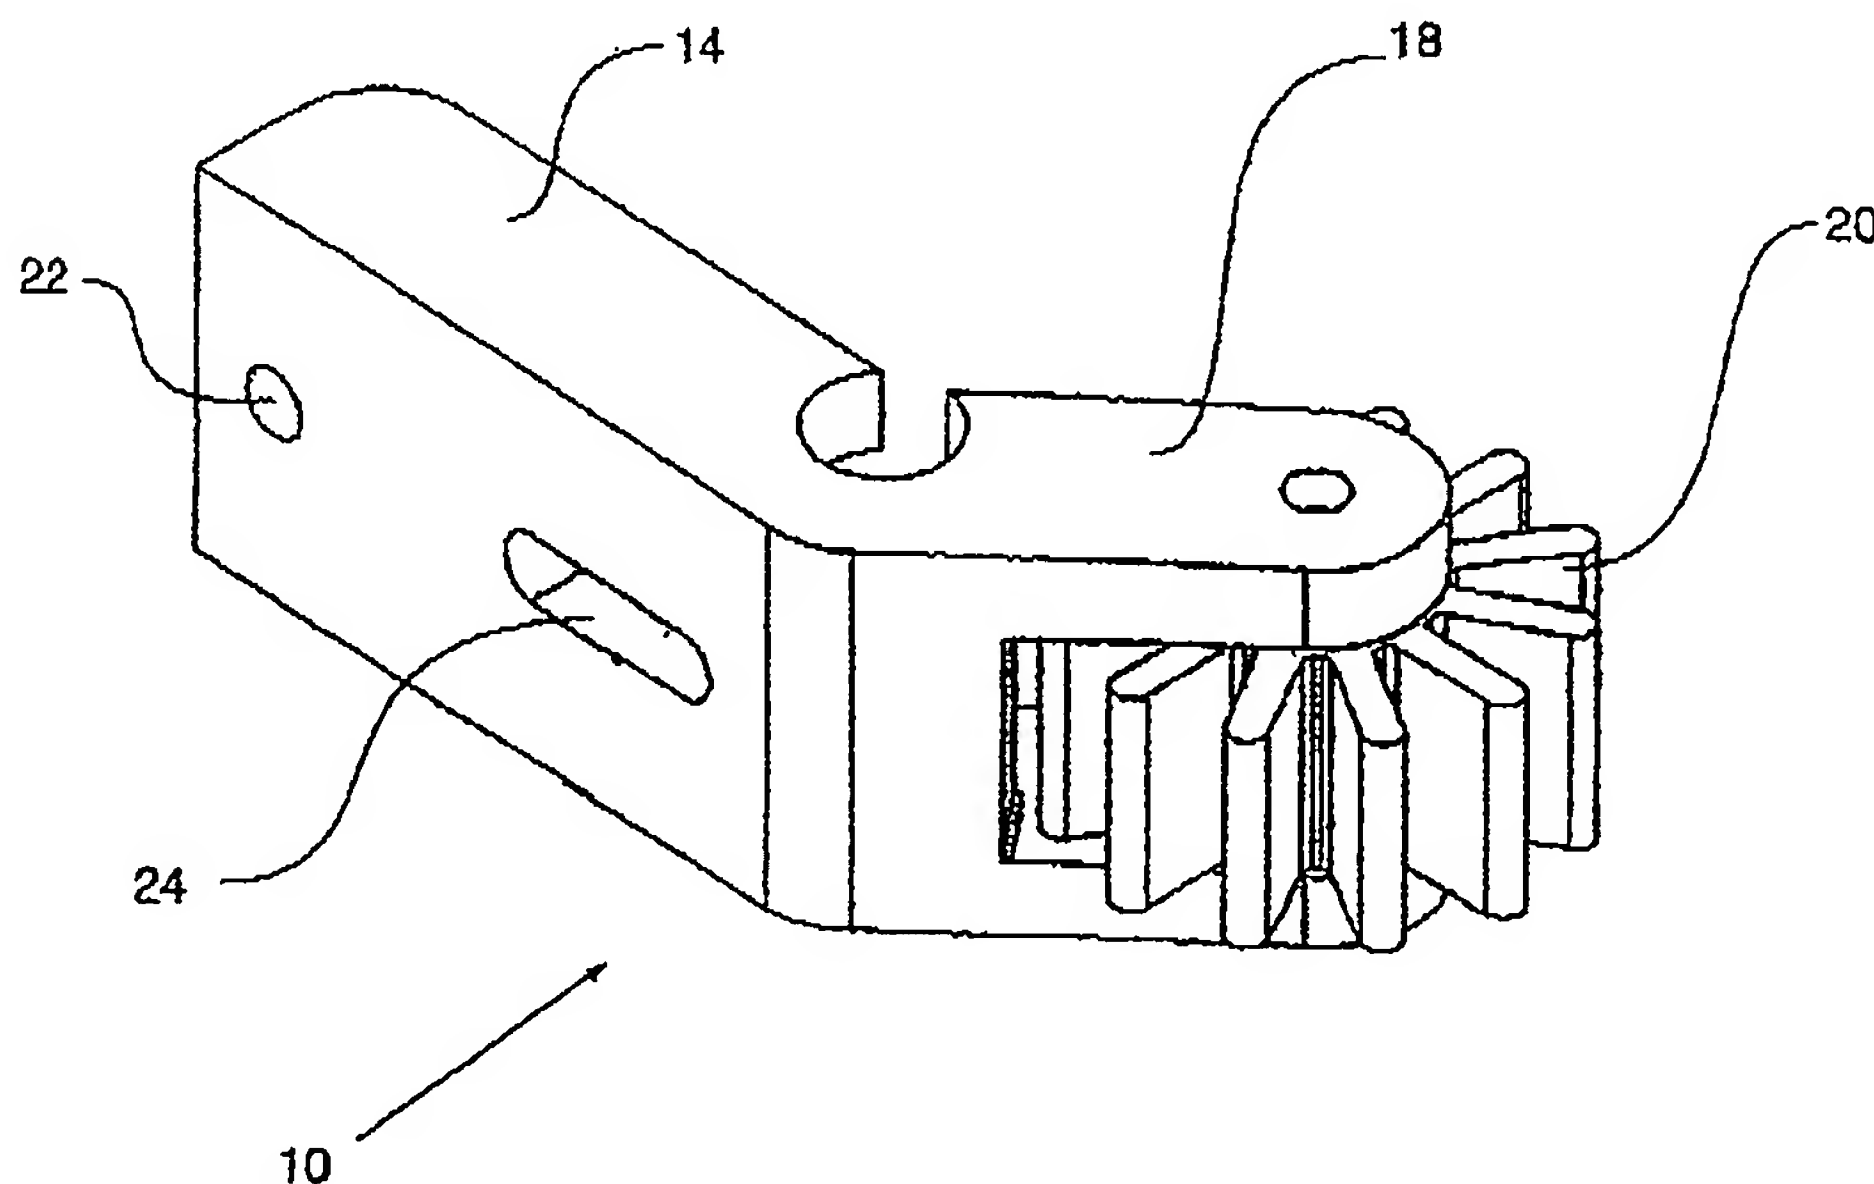

(57) Abstract: A door catch (10) for a multiple panel covered door (44) wherein there is a wheel (20) rotationally mounted at an outer end and an optionally resiliently deflectable support arm (14, 18) for rotational movement of the wheel about an axis parallel to the plane of the door, the arm adapted to be secured to the outer end of a door and where the wheel has an outer circumference provided by a plurality of radially extending portions.

WO 2005/045166 A1

BEST AVAILABLE COPY